




999.00 EUR  
incl. 19% VAT, plus [shipping](#)

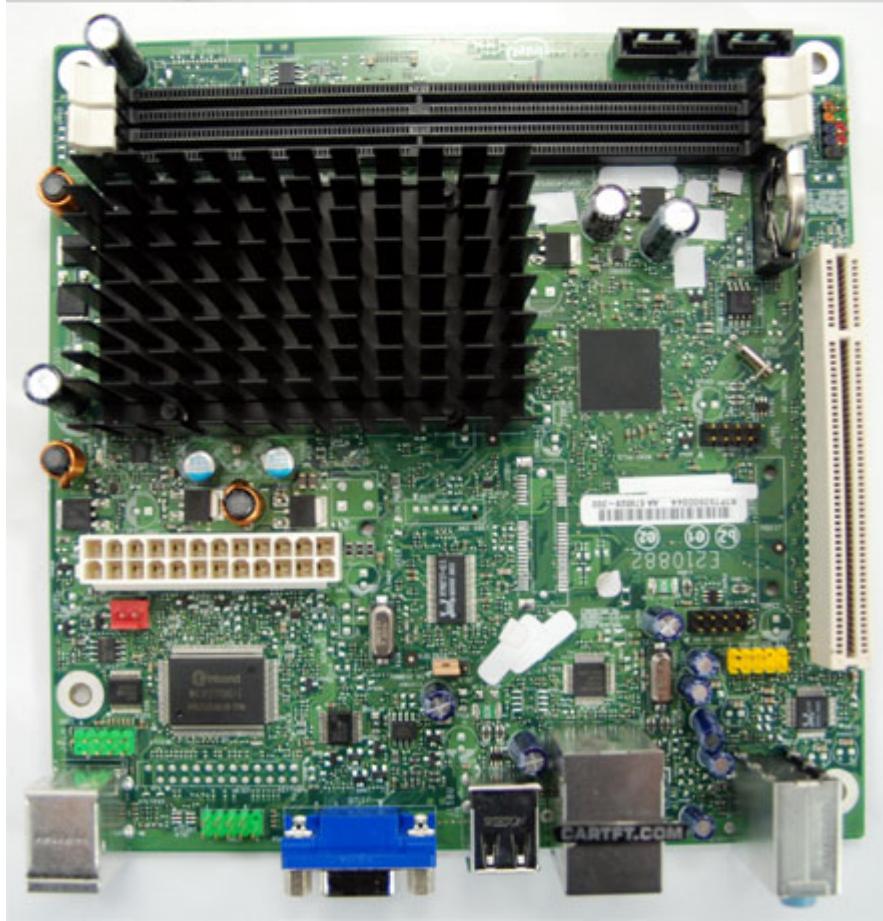

**Support:**  [Review \[DE\]](#) |  [Review \[EN\]](#)

Remnant with I/O shield. 2 years warranty.

The D410PT as well as the D510MO offer passive cooling and hide on the one hand a single Core Atom processor (D410) and on the other hand a Dual Core Atom processor (D510 – also used in numerous new netbooks) of the newest generation.

In the area of power consumption (~30 watts) the new mainboards range within the low, classic Intel Atom level. The major advantage of the new mainboard is the possibility to utilize the 24 pin ATX jack, which makes the use of an additional P4 connector unnecessary.

As with the other mainboard generations, Intel again, focuses on the extension possibilities. Therefore, both mainboards offer a willingly utilized PCI slot, and the D510MO additionally offers a Mini PCIe express socket and a LPT extension slot. With these possibilities up their sleeve, with minimum effort they offer variable fields of application.

|                       |  |
|-----------------------|--|
| Name                  | D410PT   |
| Form Factor           | Mini-ITX Mainboard   |
| CPU                   | Intel Atom D410 @ 1x 1.66GHz (Silverthorne 45nm)   |
| Chipset               | Intel NM10 Express   |
| L2 Cache              | 512kb  |
| Graphics              | Intel GMA 3150   |
| Memory                | 2x DDR2 667/800 RAM (bis zu 4GB)   |
| Power                 | 24 Pin ATX   |
| Connectors (rear)     | <ul style="list-style-type: none"> <li>- 1x PS/2</li> <li>- 1x D-SUB15 (VGA)</li> <li>- 4x USB 2.0</li> <li>- 1x LAN 10/100 MBit</li> <li>- 3x Sound (Line Out, Line In, Microphone)</li> </ul>          |
| Audio                 | Realtek High Definition Audio  |
| Connectors (internal) | <ul style="list-style-type: none"> <li>- PCI</li> <li>- Audio</li> <li>- 4x USB</li> <li>- 2x SATA</li> <li>- 2x RS232</li> </ul>  |
| Included              | <ul style="list-style-type: none"> <li>- D410PT Mainboard (with 1x 1.66Ghz Atom CPU)</li> <li>- I/O ATX rear plate</li> <li>- 2x SATA cable</li> <li>- Quickstart-Guide</li> <li>- Drivers CD</li> </ul> |

**Note :** This mainboard does not fit into Voom-2, because of the big heatsink.